LiftAll®
PRODUCTS FOR BETTER LIFTING

GANTRY CRANES

Fixed Steel (H90)

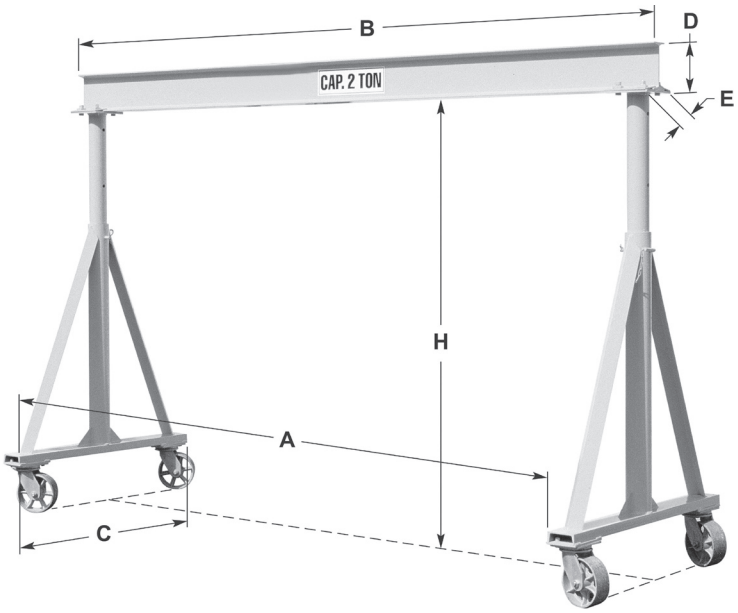

FEATURES

- Balanced design allows for easy rolling, even under load
- Simple bolt together construction
- Includes 4 steel swivel casters
- Easy set-up and maintenance

Rated Cap.* (Tons)	Height Under Beam (H) in Ft.	Nominal Span (Ft.)	A	B	C	D (In.)	E (In.)	Caster Dia. (In.)	Weight (Lbs.)	Model No.
1	10	10	10' 4"	11' 6"	5' 6"	6	3.33	6	825	H90-1-10/10
		12	12' 4"	13' 6"	5' 6"	8	4	6	930	H90-1-10/12
		14	14' 4"	15' 6"	5' 6"	8	4	6	967	H90-1-10/14
		16	16' 4"	17' 6"	5' 6"	6	4.66	6	1136	H90-1-10/16
	12	10	10' 4"	11' 6"	6' 6"	6	3.33	6	913	H90-1-12/10
		12	12' 4"	13' 6"	6' 6"	8	4	6	1018	H90-1-12/12
		14	14' 4"	15' 6"	6' 6"	8	4	6	1055	H90-1-12/14
		16	16' 4"	17' 6"	6' 6"	10	4.66	6	1224	H90-1-12/16
	14	10	10' 4"	11' 6"	7' 6"	6	3.33	6	977	H90-1-14/10
		12	12' 4"	13' 6"	7' 6"	8	4	6	1082	H90-1-14/12
		14	14' 4"	15' 6"	7' 6"	8	4	6	1119	H90-1-14/14
		16	16' 4"	17' 6"	7' 6"	10	4.66	6	1288	H90-1-14/16
	16	10	10' 4"	11' 6"	7' 6"	6	3.33	6	1081	H90-1-16/10
		12	12' 4"	13' 6"	7' 6"	8	4	6	1186	H90-1-16/12
		14	14' 4"	15' 6"	7' 6"	8	4	6	1223	H90-1-16/14
		16	16' 4"	17' 6"	7' 6"	10	4.66	6	1392	H90-1-16/16

Rated Cap.* (Tons)	Height Under Beam (H) in Ft.	Nominal Span (Ft.)	A	B	C	D (In.)	E (In.)	Caster Dia. (In.)	Weight (Lbs.)	Model No.
2	10	10	10' 4"	11' 6"	5' 6"	8	4	8	949	H90-2-10/10
		12	12' 4"	13' 6"	5' 6"	8	4	8	986	H90-2-10/12
		14	14' 4"	15' 6"	5' 6"	10	4.66	8	1131	H90-2-10/14
		16	16' 4"	17' 6"	5' 6"	10	4.66	8	1182	H90-2-10/16
	12	10	10' 4"	11' 6"	6' 6"	8	4	8	1041	H90-2-12/10
		12	12' 4"	13' 6"	6' 6"	8	4	8	1078	H90-2-12/12
		14	14' 4"	15' 6"	6' 6"	10	4.66	8	1223	H90-2-12/14
		16	16' 4"	17' 6"	6' 6"	10	4.66	8	1274	H90-2-12/16
	14	10	10' 4"	11' 6"	7' 6"	8	4	8	1101	H90-2-14/10
		12	12' 4"	13' 6"	7' 6"	8	4	8	1138	H90-2-14/12
		14	14' 4"	15' 6"	7' 6"	10	4.66	8	1283	H90-2-14/14
		16	16' 4"	17' 6"	7' 6"	10	4.66	8	1334	H90-2-14/16
	16	10	10' 4"	11' 6"	7' 6"	8	4	8	1205	H90-2-16/10
		12	12' 4"	13' 6"	7' 6"	8	4	8	1242	H90-2-16/12
		14	14' 4"	15' 6"	7' 6"	10	4.66	8	1387	H90-2-16/14
		16	16' 4"	17' 6"	7' 6"	10	4.66	8	1438	H90-2-16/16
3	10	10	9' 3"	11' 6"	5' 6"	10	4.66	8	1107	H90-3-10/10
		12	11' 3"	13' 6"	5' 6"	10	4.66	8	1157	H90-3-10/12
		14	13' 3"	15' 6"	5' 6"	10	4.66	8	1208	H90-3-10/14
		16	15' 3"	17' 6"	5' 6"	12	5	8	1427	H90-3-10/16
	12	10	9' 3"	11' 6"	6' 6"	10	4.66	8	1229	H90-3-12/10
		12	11' 3"	13' 6"	6' 6"	10	4.66	8	1279	H90-3-12/12
		14	13' 3"	15' 6"	6' 6"	10	4.66	8	1330	H90-3-12/14
		16	15' 3"	17' 6"	6' 6"	12	5	8	1529	H90-3-12/16
	14	10	9' 3"	11' 6"	7' 6"	10	4.66	8	1350	H90-3-14/10
		12	11' 3"	13' 6"	7' 6"	10	4.66	8	1400	H90-3-14/12
		14	13' 3"	15' 6"	7' 6"	10	4.66	8	1451	H90-3-14/14
		16	15' 3"	17' 6"	7' 6"	12	5	8	1670	H90-3-14/16
	16	10	9' 3"	11' 6"	7' 6"	10	4.66	8	1473	H90-3-16/10
		12	11' 3"	13' 6"	7' 6"	10	4.66	8	1523	H90-3-16/12
		14	13' 3"	15' 6"	7' 6"	10	4.66	8	1574	H90-3-16/14
		16	15' 3"	17' 6"	7' 6"	12	5	8	1793	H90-3-16/16
5	10	10	9' 3"	11' 6"	5' 6"	12	5	8	1397	H90-5-10/10
		12	11' 3"	13' 6"	5' 6"	12	5	8	1467	H90-5-10/12
		14	13' 3"	15' 6"	5' 6"	15	5.5	8	1537	H90-5-10/14
		16	15' 3"	17' 6"	5' 6"	15	5.5	8	1992	H90-5-10/16
	12	10	9' 3"	11' 6"	6' 6"	12	5	8	1519	H90-5-12/10
		12	11' 3"	13' 6"	6' 6"	12	5	8	1589	H90-5-12/12
		14	13' 3"	15' 6"	6' 6"	15	5.5	8	1659	H90-5-12/14
		16	15' 3"	17' 6"	6' 6"	15	5.5	8	2114	H90-5-12/16
	14	10	9' 3"	11' 6"	7' 6"	12	5	8	1640	H90-5-14/10
		12	11' 3"	13' 6"	7' 6"	12	5	8	1710	H90-5-14/12
		14	13' 3"	15' 6"	7' 6"	15	5.5	8	1780	H90-5-14/14
		16	15' 3"	17' 6"	7' 6"	15	5.5	8	2235	H90-5-14/16
	16	10	9' 3"	11' 6"	7' 6"	12	5	8	1763	H90-5-16/10
		12	11' 3"	13' 6"	7' 6"	12	5	8	1833	H90-5-16/12
		14	13' 3"	15' 6"	7' 6"	15	5.5	8	1903	H90-5-16/14
		16	15' 3"	17' 6"	7' 6"	15	5.5	8	2358	H90-5-16/16

LiftAll®
PRODUCTS FOR BETTER LIFTING

GANTRY CRANES

Adjustable Steel (K90)

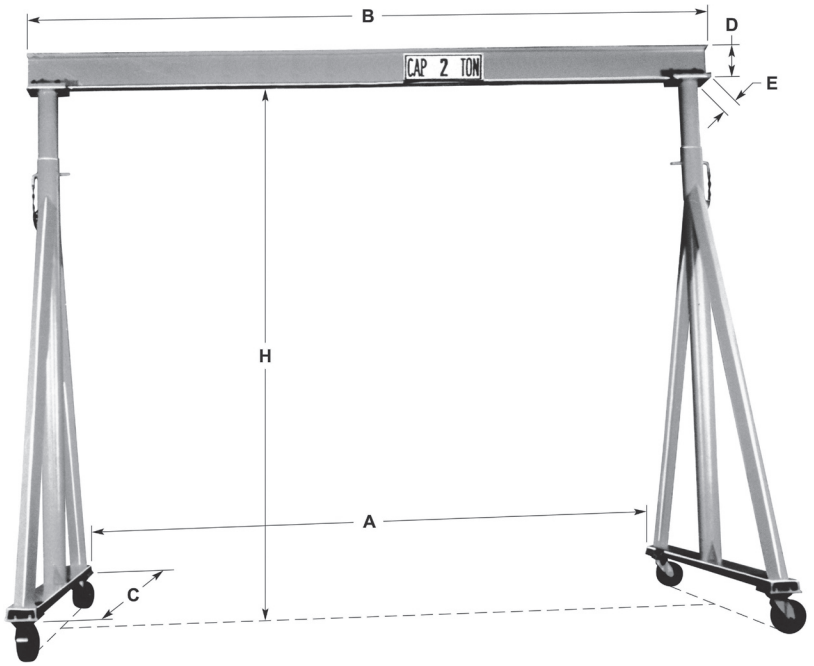

FEATURES

- Balanced design allows for easy rolling, even under load
- Simple bolt together construction
- Includes 4 steel swivel casters
- Easy set-up and maintenance
- Height adjustable in 1 ft. increments

Rated Cap.* (Tons)	Max. Height Under Beam (H) in Ft.	Nominal Span (Ft.)	A	B	C	D (In.)	E (In.)	Caster Dia. (In.)	Min. Height Under Beam (H)	Weight (Lbs.)	Model No.
1	10	10	10' 4"	11' 6"	5' 6"	6	3.33	6	6' 5"	847	K90-1-10/10
		12	12' 4"	13' 6"	5' 6"	8	4	6	6' 5"	952	K90-1-10/12
		14	14' 4"	15' 6"	5' 6"	8	4	6	6' 5"	989	K90-1-10/14
		16	16' 4"	17' 6"	5' 6"	10	4.66	6	6' 5"	1158	K90-1-10/16
	12	10	10' 4"	11' 6"	6' 6"	6	3.33	6	7' 5"	944	K90-1-12/10
		12	12' 4"	13' 6"	6' 6"	8	4	6	7' 5"	1049	K90-1-12/12
		14	14' 4"	15' 6"	6' 6"	8	4	6	7' 5"	1086	K90-1-12/14
		16	16' 4"	17' 6"	6' 6"	10	4.66	6	7' 5"	1225	K90-1-12/16
	14	10	10' 4"	11' 6"	7' 6"	6	3.33	6	8' 5"	1028	K90-1-14/10
		12	12' 4"	13' 6"	7' 6"	8	4	6	8' 5"	1133	K90-1-14/12
		14	14' 4"	15' 6"	7' 6"	8	4	6	8' 5"	1170	K90-1-14/14
		16	16' 4"	17' 6"	7' 6"	10	4.66	6	8-' 5"	1339	K90-1-14/16
	16	10	10' 4"	11' 6"	7' 6"	6	3.33	6	10' 5"	1132	K90-1-16/10
		12	12' 4"	13' 6"	7' 6"	8	4	6	10' 5"	1237	K90-1-16/12
		14	14' 4"	15' 6"	7' 6"	8	4	6	10' 5"	1274	K90-1-16/14
		16	16' 4"	17' 6"	7' 6"	10	4.66	6	10' 5"	1443	K90-1-16/16

Rated Cap. (Tons)	Max. Height Under Beam (H) in Ft.	Nominal Span (Ft.)	A	B	C	D (In.)	E (In.)	Caster Dia. (In.)	Min. Height Under Beam (H)	Weight (Lbs.)	Model No.
2	10	10	10' 4"	11' 6"	5' 6"	8	4	8	6' 8"	971	K90-2-10/10
		12	12' 4"	13' 6"	5' 6"	8	4	8	6' 8"	1008	K90-2-10/12
		14	14' 4"	15' 6"	5' 6"	10	4.66	8	6' 8"	1153	K90-2-10/14
		16	16' 4"	17' 6"	5' 6"	10	4.66	8	6' 8"	1204	K90-2-10/16
	12	10	10' 4"	11' 6"	6' 6"	8	4	8	7' 8"	1068	K90-2-12/10
		12	12' 4"	13' 6"	6' 6"	8	4	8	7' 8"	1105	K90-2-12/12
		14	14' 4"	15' 6"	6' 6"	10	4.66	8	7' 8"	1250	K90-2-12/14
		16	16' 4"	17' 6"	6' 6"	10	4.66	8	7' 8"	1301	K90-2-12/16
	14	10	10' 4"	11' 6"	7' 6"	8	4	8	8' 8"	1152	K90-2-14/10
		12	12' 4"	13' 6"	7' 6"	8	4	8	8' 8"	1189	K90-2-14/12
		14	14' 4"	15' 6"	7' 6"	10	4.66	8	8' 8"	1334	K90-2-14/14
		16	16' 4"	17' 6"	7' 6"	10	4.66	8	8' 8"	1385	K90-2-14/16
	16	10	10' 4"	11' 6"	7' 6"	8	4	8	10' 8"	1256	K90-2-16/10
		12	12' 4"	13' 6"	7' 6"	8	4	8	10' 8"	1293	K90-2-16/12
		14	14' 4"	15' 6"	7' 6"	10	4.66	8	10' 8"	1438	K90-2-16/14
		16	16' 4"	17' 6"	7' 6"	10	4.66	8	10' 8"	1489	K90-2-16/16
3	10	10	9' 3"	11' 6"	5' 6"	10	4.66	8	6' 11"	1165	K90-3-10/10
		12	11' 3"	13' 6"	5' 6"	10	4.66	8	6' 11"	1215	K90-3-10/12
		14	13' 3"	15' 6"	5' 6"	10	4.66	8	6' 11"	1266	K90-3-10/14
		16	15' 3"	17' 6"	5' 6"	12	5	8	6' 11"	1485	K90-3-10/16
	12	10	9' 3"	11' 6"	6' 6"	10	4.66	8	7' 11"	1292	K90-3-12/10
		12	11' 3"	13' 6"	6' 6"	10	4.66	8	7' 11"	1342	K90-3-12/12
		14	13' 3"	15' 6"	6' 6"	10	4.66	8	7' 11"	1393	K90-3-12/14
		16	15' 3"	17' 6"	6' 6"	12	5	8	7' 11"	1612	K90-3-12/16
	14	10	9' 3"	11' 6"	7' 6"	10	4.66	8	8' 11"	1416	K90-3-14/10
		12	11' 3"	13' 6"	7' 6"	10	4.66	8	8' 11"	1466	K90-3-14/12
		14	13' 3"	15' 6"	7' 6"	10	4.66	8	8' 11"	1517	K90-3-14/14
		16	15' 3"	17' 6"	7' 6"	12	5	8	8' 11"	1736	K90-3-14/16
	16	10	9' 3"	11' 6"	7' 6"	10	4.66	8	10' 11"	1543	K90-3-16/10
		12	11' 3"	13' 6"	7' 6"	10	4.66	8	10' 11"	1593	K90-3-16/12
		14	13' 3"	15' 6"	7' 6"	10	4.66	8	10' 11"	1644	K90-3-16/14
		16	15' 3"	17' 6"	7' 6"	12	5	8	10' 11"	1863	K90-3-16/16
5	10	10	9' 3"	11' 6"	5' 6"	12	5	8	7'	1455	K90-5-10/10
		12	11' 3"	13' 6"	5' 6"	12	5	8	7'	1525	K90-5-10/12
		14	13' 3"	15' 6"	5' 6"	15	5.5	8	7'	1595	K90-5-10/14
		16	15' 3"	17' 6"	5' 6"	15	5.5	8	7'	2050	K90-5-10/16
	12	10	9' 3"	11' 6"	6' 6"	12	5	8	8'	1582	K90-5-12/10
		12	11' 3"	13' 6"	6' 6"	12	5	8	8'	1652	K90-5-12/12
		14	13' 3"	15' 6"	6' 6"	15	5.5	8	8'	1722	K90-5-12/14
		16	15' 3"	17' 6"	6' 6"	15	5.5	8	8'	2177	K90-5-12/16
	14	10	9' 3"	11' 6"	7' 6"	12	5	8	9'	1706	K90-5-14/10
		12	11' 3"	13' 6"	7' 6"	12	5	8	9'	1776	K90-5-14/12
		14	13' 3"	15' 6"	7' 6"	15	5.5	8	9'	1846	K90-5-14/14
		16	15' 3"	17' 6"	7' 6"	15	5.5	8	9'	2301	K90-5-14/16
	16	10	9' 3"	11' 6"	7' 6"	12	5	8	11'	1833	K90-5-16/10
		12	11' 3"	13' 6"	7' 6"	12	5	8	11'	1903	K90-5-16/12
		14	13' 3"	15' 6"	7' 6"	15	5.5	8	11'	1973	K90-5-16/14
		16	15' 3"	17' 6"	7' 6"	15	5.5	8	11'	2428	K90-5-16/16

LiftAll®
PRODUCTS FOR BETTER LIFTING

GANTRY CRANES

Fixed Aluminum (HA90)

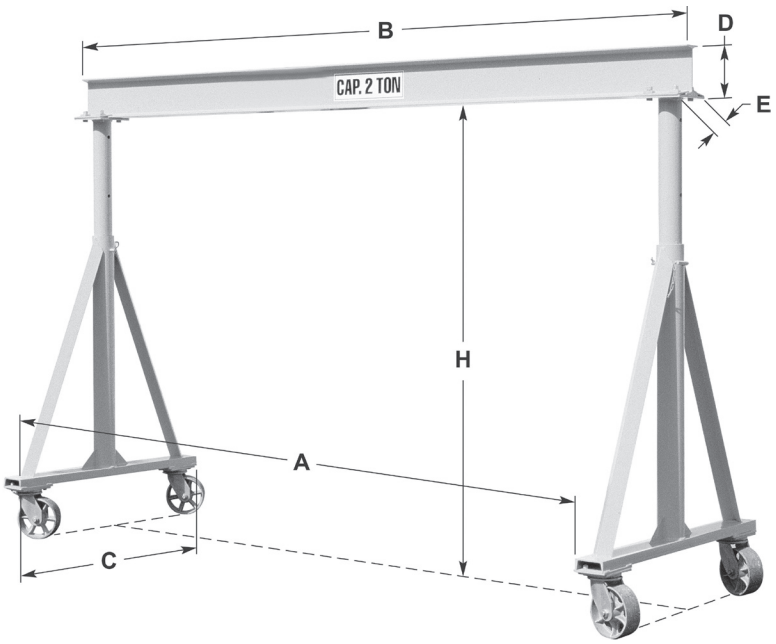

FEATURES

- Light-weight Aluminum construction
- Balanced design allows for easy rolling, even under load
- Simple bolt together construction
- Includes 4 poly-coated swivel casters
- Easy set-up and maintenance

Rated Cap. (Tons)	Height Under Beam (H)	Nominal Span (Ft.)	A	B	C	D (In.)	E (In.)	Caster Dia. (In.)	Weight (Lbs.)	Model No.
1	7' 6"	6	6' 10"	8' 4"	4'	6	3.33	6	212	HA90-1-7/6
		9	9'	10' 6"	4'	8	4	6	238	HA90-1-7/9
		11	11'	12' 6"	4'	8	4	6	251	HA90-1-7/11
	9' 2"	6	6' 10"	8' 4"	5'	6	3.33	6	234	HA90-1-9/6
		9	9'	10' 6"	5'	8	4	6	260	HA90-1-9/9
		11	11'	12' 6"	5'	8	4	6	273	HA90-1-9/11
	10' 10"	6	6' 10"	8' 4"	6'	6	3.33	6	258	HA90-1-10/6
		9	9'	10' 6"	6'	8	4	6	284	HA90-1-10/9
		11	11'	12' 6"	6'	8	4	6	297	HA90-1-10/11
2	7' 6"	6	6' 4"	8' 4"	4'	8	4	8	351	HA90-2-7/6
		8	8' 6"	10' 6"	4'	10	4.66	8	408	HA90-2-7/8
		10	10' 6"	12' 6"	4'	10	4.66	8	429	HA90-2-7/10
	9' 2"	6	6' 4"	8' 4"	5'	8	4	8	371	HA90-2-9/6
		8	8' 6"	10' 6"	5'	10	4.66	8	428	HA90-2-9/8
		10	10' 6"	12' 6"	5'	10	4.66	8	449	HA90-2-9/10
	10' 10"	6	6' 4"	8' 4"	6'	8	4	8	401	HA90-2-10/6
		8	8' 6"	10' 6"	6'	10	4.66	8	458	HA90-2-10/8
		10	10' 6"	12' 6"	6'	10	4.66	8	479	HA90-2-10/10

GANTRY CRANES

Adjustable Aluminum (KA90)

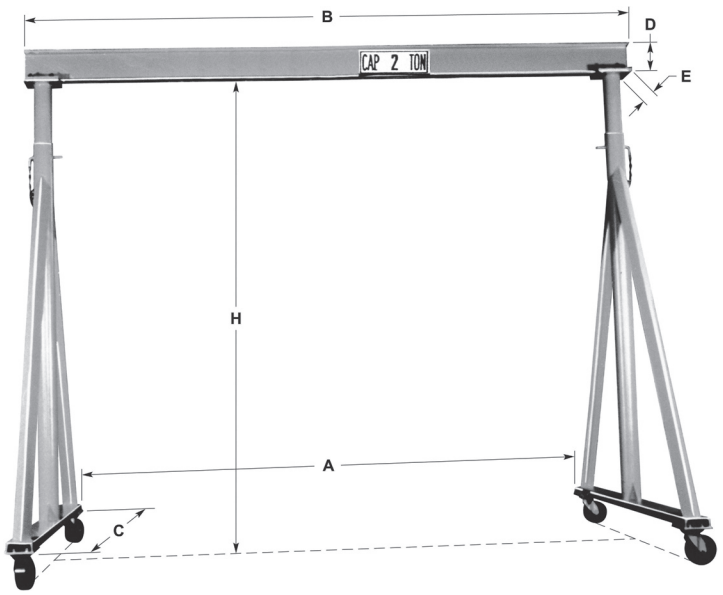

FEATURES

- Light-weight Aluminum construction
- Balanced design allows for easy rolling, even under load
- Simple bolt together construction
- Includes 4 poly-coated swivel casters
- Easy set-up and maintenance
- Height adjustable in 6 in. increments

Rated Cap. (Tons)	Max. Height Under Beam (H)	Nominal Span (Ft.)	A	B	C	D (In.)	E (In.)	Caster Dia. (In.)	Min. Height Under Beam (H)	Weight (Lbs.)	Model No.
1	7' 6"	6	6' 7"	8' 4"	4'	6	3.44	6	5' 6"	350	KA90-1-7/6
		8	8' 9"	10' 6"	4'	8	4	6	5' 6"	375	KA90-1-7/8
		10	10' 9"	12' 6"	4'	8	4	6	5' 6"	390	KA90-1-7/10
	9' 2"	6	6' 7"	8' 4"	5'	6	3.44	6	6' 2"	360	KA90-1-9/6
		8	8' 9"	10' 6"	5'	8	4	6	6' 2"	385	KA90-1-9/8
		10	10' 9"	12' 6"	5'	8	4	6	6' 2"	400	KA90-1-9/10
	10' 10"	6	6' 7"	8' 4"	6'	6	3.44	6	7' 10"	385	KA90-1-10/6
		8	8' 9"	10' 6"	6'	8	4	6	7' 10"	410	KA90-1-10/8
		10	10' 9"	12' 6"	6'	8	4	6	7' 10"	425	KA90-1-10/10
	12' 6"	6	6' 7"	8' 4"	6' 6"	6	3.44	6	9' 6"	415	KA90-1-12/6
		8	8' 9"	10' 6"	6' 6"	8	4	6	9' 6"	440	KA90-1-12/8
		10	10' 9"	12' 6"	6' 6"	8	4	6	9' 6"	455	KA90-1-12/10
2	7' 6"	6	6'	8' 4"	4'	8	4	8	5' 6"	460	KA90-2-7/6
		8	8' 2"	10' 6"	4'	10	4.66	8	5' 6"	500	KA90-2-7/8
		10	10' 6"	12' 6"	4'	10	4.66	8	5' 6"	525	KA90-2-7/10
	9' 2"	6	6'	8' 4"	5'	8	4	8	6' 2"	485	KA90-2-9/6
		8	8' 2"	10' 6"	5'	10	4.66	8	6' 2"	525	KA90-2-9/8
		10	10' 6"	12' 6"	5'	10	4.66	8	6' 2"	550	KA90-2-9/10
	10' 10"	6	6'	8' 4"	6'	8	4	8	7' 10"	520	KA90-2-10/6
		8	8' 2"	10' 6"	6'	10	4.66	8	7' 10"	560	KA90-2-10/8
		10	10' 6"	12' 6"	6'	10	4.66	8	7' 10"	585	KA90-2-10/10
	12' 6"	6	6'	8' 2"	6' 6"	8	4	8	9' 6"	530	KA90-2-12/6
		8	8' 2"	10' 6"	6' 6"	10	4.66	8	9' 6"	570	KA90-2-12/8
		10	10' 6"	12' 6"	6' 6"	10	4.66	8	9' 6"	595	KA90-2-12/10