


# CONSTRUCTION TOOLS

## Barrier Lifting Grab (BLG-1)

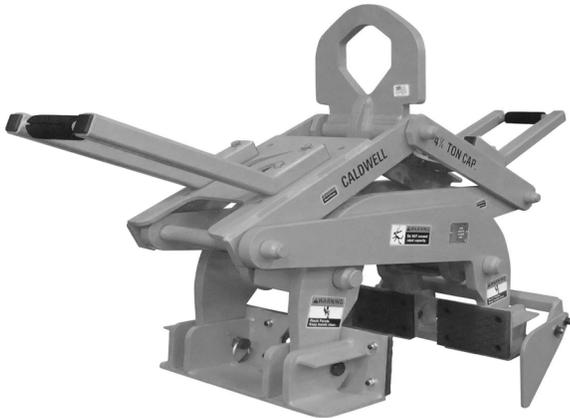


### SPECIFICATIONS

Rated Cap. (Lbs.)	Part No.	Wt. (Lbs.)
<b>With Polyurethane Lifting Pads</b>		
8,500	BLG-4	602
14,500	BLG-7	652
<b>With Steel "Dog Point" Lifting Pads</b>		
8,500	BLG-4-DP	602
14,500	BLG-7-DP	652

### PRODUCT FEATURES AND BENEFITS:

- New, compact & rugged design holds up to the work environment where barriers are used.
- Handles concrete barriers from 6" – 12" nominal width at the top of barrier.
- Stainless steel Auto-Latch.
- Auto-Latch mounting insures proper alignment.
- Locating assembly orientates tong on barrier without operator intervention and will pivot when grab is set on the ground.
- Gripping pads pivot to conform with the load.
- Replaceable polyurethane pads protect barrier.
- Alloy steel dog-point pads bite into painted barrier surfaces (typical in coastal areas).
- Centering guide cut out on grab shoe helps to properly center tong over barrier for a level lift.
- Extended handles on each side keep operator away from load and can be adjusted as needed.
- Lifting eye allows for easy hook attachment, self-centers rigging, and will accommodate a fork.

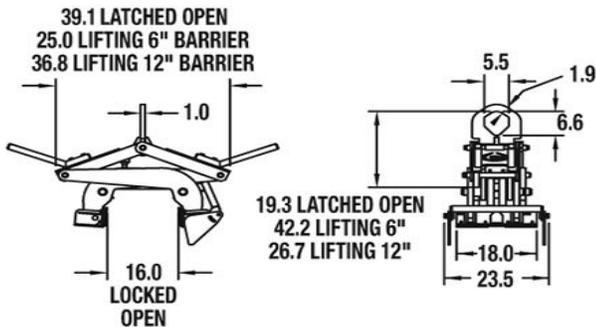

## Operation

Place tong on barrier, lower crane completely to disengage the Auto-Latch.

Lift and position barrier in desired location.

Lower crane, line must go slack to engage Auto-Latch, lift tong off barrier and repeat!

