



# **SPECIALTY BEAMS**

### Fiberglass Battery Lifting Beam (BLB)

#### **FEATURES**

- Non-conductive for lifting industrial size fork lift or similar batteries
- Up to 70% lighter than other beams
- · Available for single or multiple size batteries
- Heavy duty capacities of 4,800 lbs. and 7,000 lbs.
- · Acid resistant coated polyester straps and hooks
- 36" standard spread custom lengths available
- Swivel hooks standard





Optional J Hooks

Available in place of swivel hooks




### Fixed Length (BLBF)

Rated Cap. (Lbs.)	Part No.*	Oblong Size (in.) Dia. •B•C	Headroom (in.)	Wt. (Lbs.)
4,800	BLB48F	.63•3•6	29	16
7,000	BLB70F	.75•2.75•5.5	30	20

#### Adjustable (BLBA)

Rated Cap. (Lbs.)	Part No.*	Oblong Size (in.) Dia. •B•C	Headroom (in.)	Wt. (Lbs.)
4,800	BLB48A	.63•3•6	39	17
7,000	BLB70A	.75•2.75•5.5	40 1/2	20

Note: Maximum spread range is 12"



<sup>\*</sup> Add a "J" to Part No. for Optional J Hooks




# **SPECIALTY BEAMS**

## Battery Lifting Beam (BLBLHA) Low Headroom, Adjustable

#### **FEATURES**

- Low Headroom, 18.3"
- · Adjustable to handle batteries of different lengths
- Non-conductive beam
- Acid-resistant, coated polyester straps with either swivel or J-hook

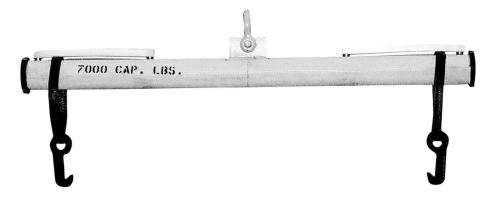

Swivel Hooks Standard J Hooks Available

Rated Capacity (Lbs.)	Part No.	Standard Spread (In.)	Wt. (Lbs.)
7,000	BLBLHA	45	110

