
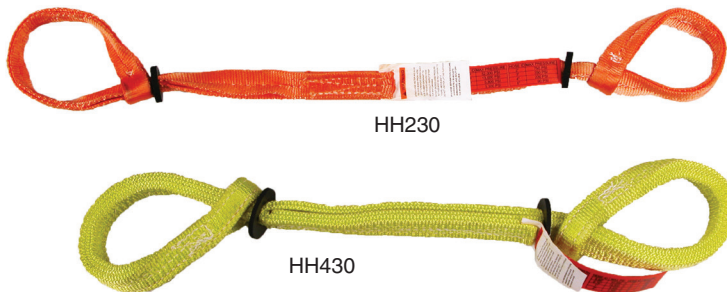


HOSE HALTERS™

Help protect your workers from injury and your equipment from damage

To reduce damage to equipment and injury to personnel when hoses accidentally disconnect while under pressure, be sure to use the new Lift-All **Hose Halters™**. Suitable for use on pneumatic, water and hydraulic hoses, these easy to install straps are made from strong, flexible nylon webbing. Slide the rubber grommets (2) to keep choked eyes snug on the hose. The available standard lengths will accommodate hoses with inside diameters from 1/4" up to 6". Meets both OSHA and Canada OHS requirements for restraining devices on hose connections.

Available in Four
Different Strengths

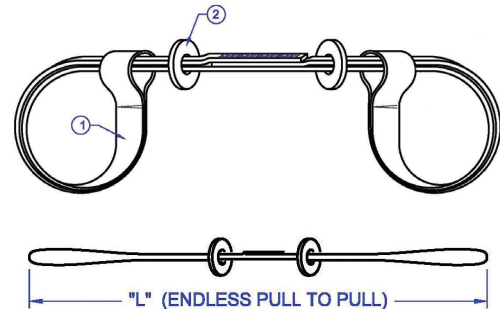

**OSHA
1926.603(a)(10)**
states: Safety
chains, or equivalent
means, shall be
provided for each
hose connection to
prevent the line from
thrashing around in
case the coupling
becomes
disconnected.

| Part # | Length (L) | Recommended for Use on the Following Hose Inside Diameters | | | | | | | |
|--------|---------------|--|--------|--------|-------|-------|-------|-----|-----|
| | | 1/4" | 1/2" | 3/4" | 1" | 2" | 3" | 4" | 6" |
| | | Hose Maximum Internal Pressure (PSI) at Above Hose I.D. | | | | | | | |
| HH130 | 30" | 26,000 | 6,500 | 2,900 | 1,650 | 400 | - | - | - |
| HH140 | 40" | - | - | - | 1,650 | 400 | 175 | 100 | - |
| HH230 | 30" | 52,000 | 13,000 | 5,800 | 3,300 | 750 | - | - | - |
| HH244 | 44" | - | - | - | 3,300 | 750 | 350 | 200 | - |
| HH264 | 64" | - | - | - | - | 750 | 350 | 200 | 90 |
| HH330 | 30" | - | 29,000 | 13,000 | 7,300 | 1,800 | - | - | - |
| HH344 | 44" | - | - | - | 7,300 | 1,800 | 820 | 460 | - |
| HH364 | 64" | - | - | - | - | 1,800 | 820 | 460 | 200 |
| HH430 | 30" | - | 37,000 | 16,000 | 9,400 | 2,300 | - | - | - |
| HH444 | 44" | - | - | - | 9,400 | 2,300 | 1,040 | 580 | - |
| HH464 | 64" | - | - | - | - | 2,300 | 1,040 | 580 | 260 |