


BRAIDED *TUFLEX*® ROUNDSLINGS

For multi-part heavy lifting, braided *Tuflex* roundslings offer you additional security.

Safety Built-In

Tuflex braids are made from three (6-Part), or four (8-Part) individual *Tuflex* roundslings. Should one of these component slings be damaged while in use, the remaining undamaged slings will be able to assist in safely returning the load to the ground.

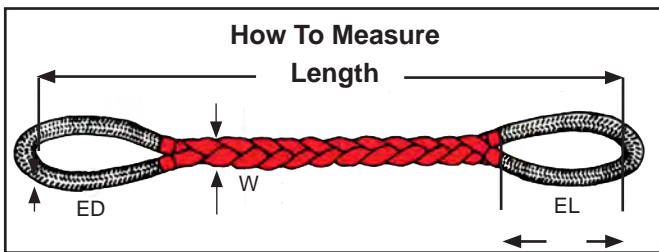

Features and Benefits

Maintains all the basic *Tuflex* features plus...

Promotes Safety

- Braided construction offers engineered safety.
- Lightweight and more flexible than chain slings.

Saves Money

- Large capacity slings are generally purchased for one major lift, then rarely used again. Braided *Tuflex* roundslings can be returned to *Lift-All* for disassembly, inspection, and re-tagging as individual slings.
- 6-part flat braid offers wide-body for load stability.

Saves Time

- Easy to transport and hook-up.

6-Part Flat Braid (B6E)														
Part Number	Color	Rated Capacity (lbs.)*				Min. Sling Length ⁺ (ft.)	Approximate Measurements							
		Vertical	Choker	Basket	Basket @ 45°		Wt. (lbs. per ft.)	Standard Eye Length (EL) (in.)	Width @ Load (W) (in.)	Thickness at Load (in.)	Eye Dia. (ED) (in.)	Minimum Hardware Dia.** (in.)	Minimum Edge Contact Radii (in.)	
B6E30	Purple	6,700	5,300	13,400	9,400	4.50	0.8	15	3.25	0.75	1.75	0.63	0.313	
B6E60	Green	13,500	10,800	27,000	19,000	5.00	1.2	15	3.75	1.13	2.00	1.00	0.438	
B6E90	Yellow	21,400	17,100	42,800	30,000	5.50	1.6	15	4.25	1.25	2.00	1.25	0.500	
B6E120	Tan	27,000	21,600	54,000	38,000	5.50	2.0	15	4.50	1.31	2.25	1.38	0.625	
B6E150	Red	33,600	26,800	67,200	47,000	6.50	2.7	20	5.25	1.75	2.50	1.50	0.688	
B6E180	White	42,800	34,200	85,600	60,000	7.00	3.2	20	5.50	2.00	2.75	1.75	0.813	
B6E240	Blue	54,000	43,200	108,000	76,000	9.00	4.4	20	6.63	2.25	3.50	1.75	0.813	
B6E360	Gray	79,000	63,200	158,000	111,000	9.50	6.5	30	8.25	2.50	4.25	2.50	1.00	
B6E600	Brown	135,100	108,000	270,200	191,000	10.50	9.7	30	11.00	2.75	5.00	3.00	1.313	
B6E800	Olive	168,300	134,600	336,600	230,000	13.00	12.0	30	12.00	4.00	5.25	3.50	1.375	
B6E1000	Black	229,500	183,600	459,000	320,000	14.50	15.6	31	13.50	4.50	5.75	4.00	1.750	

** This is the minimum recommended diameter for the connection hardware to be used for a vertical hitch.

+ Shorter lengths available using reduced eye lengths.

*** ⚠ WARNING**

Always protect roundslings from corners, edges, or protrusions. Refer to the Sling Protection section of this catalog to choose the right protection product for your lift.

General Information
Web Slings
Round Slings
Sling Protection
Wire Rope
Chain Slings
Rigging Hardware
Mesh Slings
Load Huggers
Tow Products
Lift-All Hoists
Hoist Rings
Plate Clamps
Lifting Devices

BRAIDED *TUFLEX*[®] ROUNDSLINGS

General Information
Web Slings
Round Slings
Sling Protection
Wire Rope
Chain Slings
Rigging Hardware
Mesh Slings
Load Huggers
Tow Products
Lift-All Hoists
Hoist Rings
Plate Clamps
Lifting Devices



Order Information

Ordering length should be based on the sling at rest. Braided *Tuflex* length tolerance is $\pm 2'' + 5\%$ of the ordered length, with the sling at rest. At its rated capacity, braided *Tuflex* will stretch approximately 9%.

Always protect synthetic slings from being cut or damaged on corners, edges and protrusions by using protection sufficient for each application.



Refer to Sling Protection section in this catalog.

8-Part Round Braid (B8E)

Part Number	Color	Rated Capacity (lbs.)*				Min. Sling Length ⁺ (ft.)	Approximate Measurements						
		Vertical	Choker	Basket	Basket @ 45°		Wt. (lbs. per ft.)	Standard Eye Length (EL) (in.)	Width @ Load (W) (in.)	Thickness at Load (in.)	Eye Dia. (ED) (in.)	Minimum Hardware Dia. ** (in.)	Minimum Edge Contact Radii (in.)
B8E30	Purple	8,800	7,100	17,600	12,400	4.50	1.1	15	3.50	1.00	1.75	0.75	0.313
B8E60	Green	18,000	14,400	36,000	25,000	5.00	1.5	15	4.00	1.38	2.00	1.13	0.500
B8E90	Yellow	28,500	22,800	57,000	40,000	5.50	2.2	15	4.75	1.63	2.50	1.50	0.563
B8E120	Tan	36,000	28,800	72,000	50,000	5.50	2.6	15	5.00	1.75	2.50	1.50	0.688
B8E150	Red	44,900	35,900	89,800	63,000	6.50	3.6	20	6.00	2.13	2.75	1.75	0.750
B8E180	White	57,100	45,600	114,200	80,000	7.00	4.1	20	6.25	2.50	3.25	2.00	0.875
B8E240	Blue	72,000	57,600	144,000	101,000	9.00	5.6	20	7.50	2.75	3.75	2.00	0.938
B8E360	Gray	105,400	84,300	210,800	149,000	9.50	8.3	30	9.50	3.25	4.50	2.50	1.125
B8E600	Brown	180,200	144,100	360,400	250,000	10.50	12.0	30	13.00	3.75	5.50	3.50	1.500
B8E800	Olive	224,400	179,500	448,800	310,000	13.00	16.0	30	13.50	4.50	6.00	4.00	1.625
B8E1000	Black	306,000	244,000	612,000	430,000	14.50	20.0	31	15.75	5.25	6.50	4.75	2.00

** This is the minimum recommended diameter for the connection hardware to be used for a vertical hitch.

+ Shorter lengths available using reduced eye lengths.

⚠ WARNING

Always protect roundslings from corners, edges, or protrusions. Refer to the Sling Protection section of this catalog to choose the right protection product for your lift.