

HOIST LINES AND STEEL BUTTONS

Hoist Line Cables

Lift-All hoist lines are made using 6X19 IWRC wire core rope for better resistance to abrasion and crushing. Available with carbon hooks for large throat openings, or alloy hooks for longer life.

Features and Benefits

Promotes Safety


- *Permaloc™* Flemish Eye splice for high strength efficiency.
- Meets OSHA 1910.184 and ASME B30.9.

Saves Money

- Heavy-duty thimble in eye extends useful life.
- Economical custom assemblies.

Saves Time

- No assembly time - ready to install.
- Stainless steel latch keeps hook in proper place.

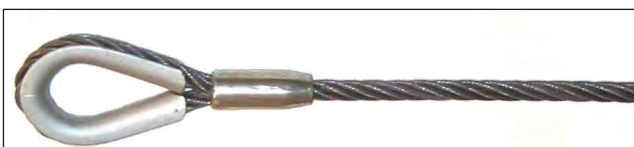


Running lengths of cable with thimble eye ends available

6X19 Class - Bright (Uncoated)	
Diameter (in.)	Break Strength
	IWRC
3/8	14,000-lbs.
7/16	19,000-lbs.
1/2	25,000-lbs.
9/16	32,000-lbs.
5/8	39,000-lbs.

Swaged Steel Buttons

Swaged steel buttons are designed for use as end stops on drum winding equipment such as hoists and winches.

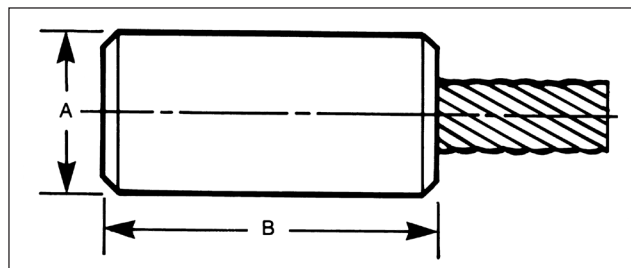

After Swage Dimensions		
Rope Diameter (in.)	A (approx.)	B (approx.)
1/4	0.63	1.13
5/16	0.75	1.50
3/8	0.88	1.75
7/16	1.00	2.00
1/2	1.13	2.38
9/16	1.25	2.63
5/8	1.38	2.88
3/4	1.50	3.50
7/8	1.75	4.13
1	2.00	4.75
1-1/8	2.25	5.25
1-1/4	2.50	5.88
1-3/8	2.75	6.50
1-1/2	3.00	7.13

Non-standard buttons are available.