
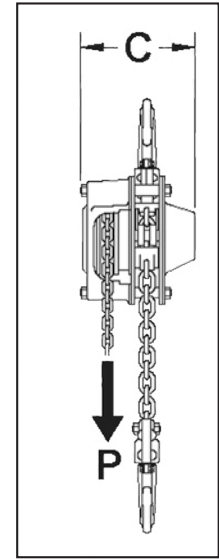


## MANUAL CHAIN HOIST (MCH)

Lift-All hoists are perfect for a low-headroom lift. These economical, durable, and lightweight hoists are excellent options for a variety of lifting applications. The fully enclosed gears are protected from contamination. Powder-coated and plated finishes on exposed components protect the hoists from corrosion. All gears and shafts run on caged roller bearings for smooth operation and long life (excludes mini pullers). The self-adjusting Weston style mechanical load brake never requires adjustment. The top hook mounting aids in rigging and helps ensure straight line loading between hooks.

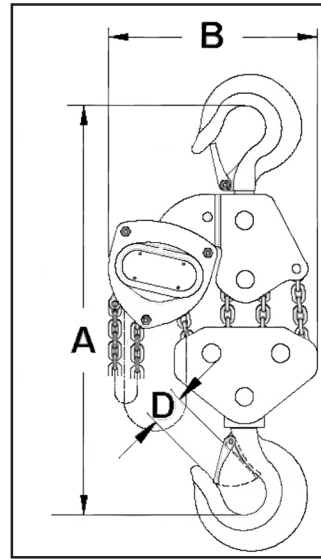

| Part Number | Lift | Metric Tons | Load Chain lbs./ft. | Hand Chain lbs./ft. | Dimensions (in./lbs.) |      |     |      |    | Weight 10' Lift |
|-------------|------|-------------|---------------------|---------------------|-----------------------|------|-----|------|----|-----------------|
|             |      |             |                     |                     | A min.                | B    | C   | D    | P  |                 |
| MCH005X10   | 10'  | .5          | 0.54                | 0.38                | 10.6                  | 5.4  | 5.4 | 1.10 | 45 | 22              |
| MCH005X20   | 20'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH005X30   | 30'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH010X10   | 10'  | 1           | 0.54                | 0.38                | 13.6                  | 6.4  | 5.8 | 1.10 | 72 | 26              |
| MCH010X20   | 20'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH010X30   | 30'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH015X10   | 10'  | 1.5         | 0.92                | 0.38                | 15.7                  | 7.2  | 6.7 | 1.28 | 81 | 42              |
| MCH015X20   | 20'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH015X30   | 30'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH020X10   | 10'  | 2           | 0.92                | 0.38                | 16.3                  | 7.6  | 6.7 | 1.26 | 82 | 44              |
| MCH020X20   | 20'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH020X30   | 30'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH030X10   | 10'  | 3           | 1.84                | 0.38                | 20.9                  | 8.7  | 6.7 | 1.46 | 87 | 59              |
| MCH030X20   | 20'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH030X30   | 30'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH050X10   | 10'  | 5           | 2.96                | 0.38                | 25.0                  | 11.3 | 7.5 | 1.80 | 98 | 101             |
| MCH050X20   | 20'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH050X30   | 30'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH100X10   | 10'  | 10          | 5.92                | 0.38                | 29.3                  | 15.1 | 7.5 | 1.97 | 98 | 183             |
| MCH100X20   | 20'  |             |                     |                     |                       |      |     |      |    |                 |
| MCH100X30   | 30'  |             |                     |                     |                       |      |     |      |    |                 |

Meets ASME B30, OSHA 1915.114, and NASA-STD-8719.9

\* **WARNING**

- Do not exceed working load limit (load rating capacity).
- Do not lift loads over people.
- Do not use to lift people.
- Use only alloy chain for overhead lifting.
- Read and follow all instructions.