

## HIDDEN TUCK HAND SPLICED SLINGS

### Features and Benefits

Maintains all the basic *Lift-All* wire rope sling features plus...

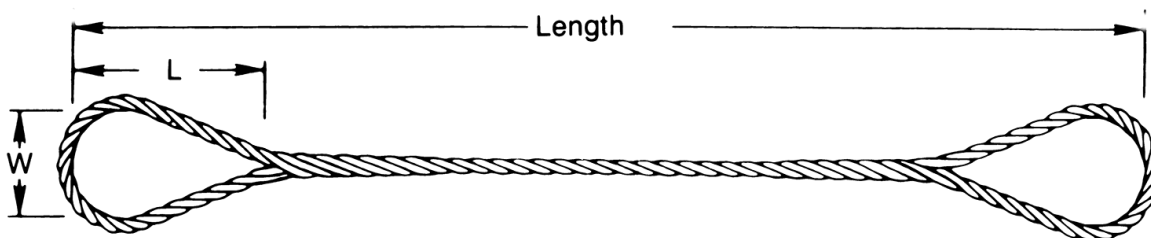

#### Promotes Safety



- Hidden tuck buries wire ends to avoid snags and injuries.

#### Saves Time

- No steel sleeves to catch under load.

**Note:** Contact Customer Service for pricing and availability.



Hidden Tuck Hand Spliced – Fiber Core						
 Rope Dia. (in.)	EIPS FC			Min. Sling Length	 Standard Eye Size W x L (in.)	
	Rated Capacity* (tons)					
	Vertical	Choker	Vertical Basket			
6X19 EIPS FC	1/4	.54	.42	1.1	2'-0"	3 X 6
	5/16	.83	.66	1.7	2'-3"	3 X 6
	3/8	1.2	.94	2.4	2'-6"	3 X 6
	7/16	1.6	1.3	3.2	2'-9"	3.5 X 7
	1/2	2.0	1.6	4.0	3'-0"	4 X 8
	9/16	2.5	2.1	5.0	3'-6"	4.5 X 9
	5/8	3.1	2.6	6.2	4'-0"	5 X 10
	3/4	4.3	3.7	8.6	4'-6"	6 X 12
	7/8	5.7	5.0	11	5'-6"	7 X 14
1	7.4	6.4	15	6'-0"	8 X 16	

Basket ratings are based on a minimum D/d of 15.

**WARNING**

Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog.