


Tow-All VEHICLE STRAP

Vehicle Recovery Strap

Aids in removing vehicles stuck in snow, mud, sand and ditches.

Tow-All Vehicle Recovery Straps are made from strong durable *Tuff-Edge II* webbing with sewn eyes, lined with premium abrasion resistant webbing, on each end. The webbing is weather resistant and will not rot or mildew. It attaches quickly to vehicle frames or towing hooks.

Tow-Alls have a limited stretch. The elastic effect absorbs shock and aids in the recovery of disabled vehicles.

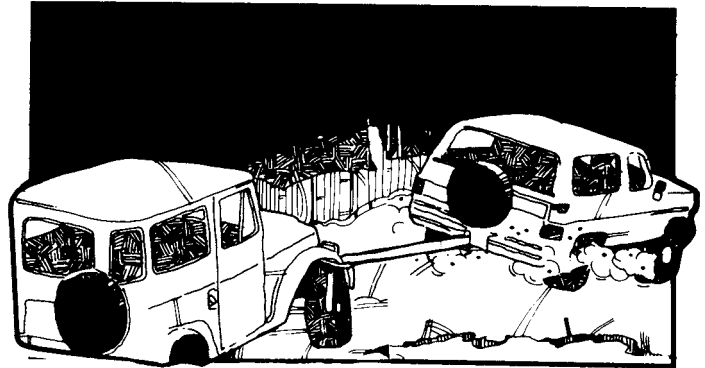

How to Order

Specify quantity and Part Number



Part No.	Ply	Web Width	Assembly Breaking Strength* (lbs.)	Rated Capacity (lbs.)
TS1802T	1	2	16,000	5,300
TS2802T	2	2	32,000	10,700
TS1803T	1	3	24,000	8,000
TS2803T	2	3	43,000	14,300
TS1804T	1	4	32,000	10,600
TS2804T	2	4	57,500	19,100
TS1806T	1	6	48,000	16,000
TS2806T	2	6	81,500	27,100

* Assembly breaking strength when new.

Tow-All Features, Advantages and Benefits

Promotes Safety

- Safer than chains or wire rope
- No dangerous hooks or metal parts

Saves Money

- Shock absorbing to reduce chance of vehicle damage

Saves Time

- Light weight and flexible for easy use and storage

Inspection Criteria for Tow-All

Remove from service if any of the following are visible:

- Signs of melting, charring or chemical damage
- Cuts on the face or edge of webbing
- Holes, tears, snags or crushed web
- Signs of excessive abrasive wear
- Broken or worn threads in the stitch patterns
- Any other visible damage which causes doubt as to its strength

Refer to photographs of damaged webbing on pages 16 & 17.

Safe Operating Practices

⚠ WARNING Read Definitions on page 3

- Do not use a damaged or defective strap - inspect before each use
- Do not exceed Rated Capacity
- Do not tie knots in strap
- Do not attach to bumpers
- Avoid dragging strap on ground
- Strap is permanently damaged when exposed to temperatures in excess of 200°F. Avoid muffler and hot exhaust systems.
- Stand clear of strap and vehicles when under load
- Avoid sharp edges, use padding where necessary
- Store in cool, dry and dark location

Note: Lift-All believes tow straps with metal end fittings are dangerous and, therefore, will not put metal hardware on TowAll straps.