

CABLE & COMPONENTS

General Information
Web Slings
Round Slings
Slings Protection
Wire Rope
Chain Slings
Rigging Hardware
Mesh Slings
Load Huggers
Tow Products
Lift-All Hoists
Hoist Rings
Plate Clamps
Lifting Devices

Galvanized & Stainless Steel Cable					
7X7	Cable Diameter (in.)	Weight per Reel (lbs.)	Standard Length (ft./Reel)	Nominal Break Strength (lbs.)	
				Galvanized Cable (GAC)	Stainless Steel Cable (SSAC) Type 304
				1/16	5
3/32	9	500	920	820	
1/8	15	500	1,700	1,500	
5/32	16	250	2,600	-	
3/16	26	250	3,700	-	
1/4	28	250	6,100	-	

7X19	3/32	9	500	1,000	920
	1/8	15	500	2,000	1,760
	5/32	12	250	2,800	2,400
	3/16	17	250	4,200	3,700
	1/4	25	250	7,000	6,400
	5/16	38	200	9,800	9,000
	3/8	52	200	14,400	12,000

Galvanized Cable Coated w/Clear Vinyl (VGAC)					
Galvanized Cable Construction	Cable Diameter (in.)	Coated to (in.)	Weight per Reel (lbs.)	Standard Length (ft./Reel)	Nominal Break Strength (lbs.)
7X7	1/16	3/32	7	500	480
	3/32	3/16	7	250	920
	1/8	3/16	10	250	1,700
7X19	1/8	3/16	10	250	2,000
	3/16	1/4	19	200	4,200
	1/4	5/16	28	200	7,000

STANDARD THIMBLES					
Rope Dia. (in.)	Dimensions (in.)			Quantity Per Bag	Weight Per Bag (lbs.)
	A	B	C		
1/8	1.31	0.69	0.25	100	4
3/16	1.31	0.69	0.31	100	4
1/4	1.31	0.69	0.38	100	4
5/16	1.50	0.82	0.44	80	3
3/8	1.63	0.94	0.50	80	4



Heavy Duty Thimbles				
Rope Diameter (in.)	Dimensions (in.)			Weight Each (lbs.)
	A	B	C	
1/4	1.63	0.88	0.44	0.08
5/16	1.88	1.06	0.53	0.14
3/8	2.13	1.13	0.66	0.22
7/16	2.32	1.25	0.75	0.36
1/2	2.75	1.50	0.94	0.51
9/16	2.75	1.50	1.00	0.35
5/8	3.25	1.75	1.03	0.75
3/4	3.75	2.00	1.25	1.47
7/8	4.25	2.25	1.44	1.85
1	4.50	2.50	1.69	3.00
1-1/8	5.13	2.88	1.81	4.00
1-1/4	6.50	3.50	2.19	8.17
1-3/8 & 1-1/2	6.25	3.50	2.56	11.75
1-5/8	8.00	4.00	2.72	17.00
1-3/4	9.00	4.50	2.84	17.75
1-7/8 & 2	12.0	6.00	3.09	25.00
2-1/4	14.0	7.00	3.63	39.50

CABLE & COMPONENTS



Wire Rope Clips

The following instructions, supplied by the Wire Rope Technical Board, will result in an approximate 80% efficiency rating when the clips are applied, as instructed, on GAC, SSAC, RRL or RLL; 6X19 class or 6X37 class; fiber core or IWRC non-Seale type construction wire rope. If applying to vinyl-coated ropes, strip the vinyl from the connection area first.

How to Apply Clips

1. Turn back the specified amount of rope from the thimble. Apply the first clip, fastening it one clip width from the dead-end of the wire rope (U-bolt over dead-end; live end rests in clip saddle). Tighten nuts evenly to recommended torque.
2. Apply the next clip as close to the loop as possible. Turn nuts firmly but do not tighten.
3. If required, place additional clips equally between the first two. Tighten nuts; take up rope slack; tighten all nuts evenly on all clips to recommended torque.
4. **NOTICE!** Apply the initial load and re-tighten nuts to the recommended torque. Wire rope will stretch, and diameter is reduced when a load is applied. Inspect periodically and re-tighten to recommended torque.

Drop Forged Wire Rope Clips				
Rope Dia. (in.)	Minimum Number of Clips	Rope Turn-back (in.)	Torque (ft./lbs.)	Weight Each (lbs.)
1/8	2	3.25	4.5	.06
3/16	2	3.75	7.5	.10
1/4	2	4.75	15	.18
5/16	2	5.25	30	.30
3/8	2	6.50	45	.47
7/16	2	7.00	65	.76
1/2	3	11.5	65	.80
9/16	3	12.0	95	1.04
5/8	3	12.0	95	1.06
3/4	4	18.0	130	1.50
7/8	4	19.0	225	2.12
1	5	26.0	225	2.50
1-1/8	6	34.0	225	2.80
1-1/4	7	44.0	360	4.15
1-3/8	7	44.0	360	4.60
1-1/2	8	54.0	360	5.30

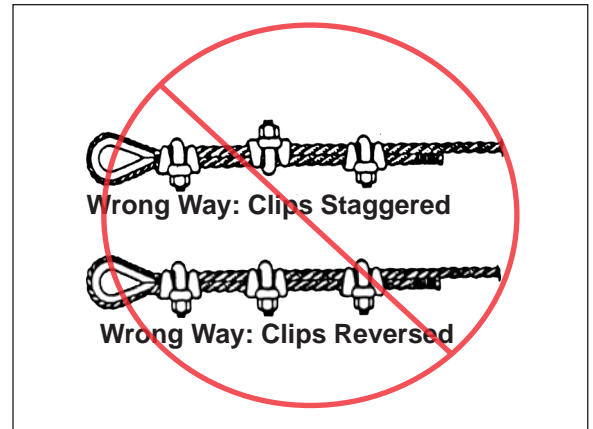

⚠ WARNING
Failure to make a termination in accordance with aforementioned instructions, or failure to periodically check and re-tighten to the recommended torque, may result in death or serious injury.



Malleable Wire Rope Clips*					
Rope Dia. (in.)	Minimum Number of Clips	Rope Turn-back (in.)	Torque (ft./lbs.)	Quantity Per Bag	Weight Per Bag (lbs.)
1/8	3	5	3	200	10
3/16	3	6	5	150	12
1/4	3	7	15	100	12
5/16	3	8	15	100	15
3/8	3	10	30	50	11

* Malleable clips are not to be used for overhead lifting. Use in light duty, non-critical applications only.

- General Information
- Web Slings
- Round Slings
- Slings Protection
- Wire Rope
- Chain Slings
- Rigging Hardware
- Mesh Slings
- Load Huggers
- Tow Products
- Lift-All Hoists
- Hoist Rings
- Plate Clamps
- Lifting Devices